

13.10.04

1304/2528

PA 1228968

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME;

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 24, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/494,610

FILING DATE: August 12, 2003

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 13 OCT 2004


WIPO

PCT

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



P. SWAIN
Certifying Officer

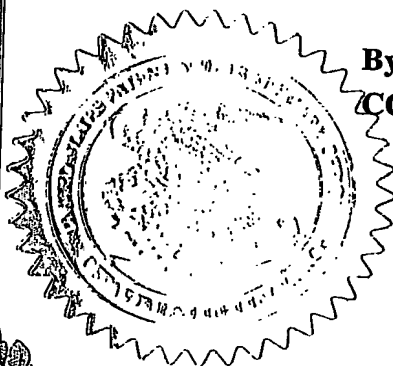

14461 U.S. PTO
08/12/03

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.
Approved for use through 07/31/2003. OMB 0851-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. EL738855167US

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
John		Hill		St. Thomas, Ontario, Canada N5P 4K7	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
METHOD OF LASER WELDING COATED MEMBERS					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number 28886					
OR					
<input checked="" type="checkbox"/> Firm or Individual Name		Kevin S. MacKenzie			
Address		CLARK HILL PLC			
Address		500 Woodward Avenue, Suite 3500			
City		Detroit		State	MI
Country		US		ZIP	48226-3435
		Telephone	(313) 965-8300	Fax	(313) 965-8252
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		7		<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		3		<input checked="" type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76		Certificate of Express Mail; Return Postcard			
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number 50-1759					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
FILING FEE AMOUNT (\$) \$160.00					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE Kevin MacKenzie

TYPED or PRINTED NAME Kevin S. MacKenzie

TELEPHONE (313) 965-8331

Date 08/12/2003

REGISTRATION NO. 45,639

(if appropriate)
Docket Number: 20912-094224

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application,

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Conv provided by USPTO from the PTO

14461 U.S. PTO
08/12/03
60/494610

CERTIFICATE OF MAILING BY EXPRESS MAIL

EXPRESS MAIL LABEL NO. EL738855167US

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on August 12, 2003, and is addressed to: Mail Stop PROVISIONAL, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

By: Andrea Y. Downing
Andrea Y. Downing

Attorney Docket No. 20912-094224

METHOD OF LASER WELDING COATED MEMBERS

Field of the Invention

[0001] The present invention relates to a method of laser welding sheet metal, and more particularly, to a method of laser welding sheet metal having a layer of a coating material.

Description of the Related Art

[0002] The automotive industry uses a variety of coated or galvanized products to increase the durability of vehicle structures. Weld joints are generally made by spot welding to join together the parts. Through the use of a high powered laser for welding, joints can be made more quickly and with better quality than other alternative joining techniques. In addition, the advantage of having a single side access, as opposed to requiring access to both sides of a work piece for conventional joining techniques, as well as no direct contact with the work piece make laser welding a desirable welding technique.

[0003] According to general laser welding practice, two sheets that are to be joined are held together contacting each other along the area to be joined. A laser beam is then energized and swept across the area to be joined welding the sheets together by smelting or melting the metal in the area swept by the laser beam.

[0004] A common problem associated with welding coated or galvanized sheet metal includes the vaporization of the zinc galvanized coating resulting in zinc gas explosion leading to a poor weld having defects or pits weakening the joints and creating a visually unacceptable part.

[0005] Removal of the protective coating in the weld joint area is an unacceptable alternative to avoid the zinc gas problem discussed above. By removing the galvanized coating, the weld joint would be susceptible to corrosion by external elements, such as the weather, resulting in a shortened life span of a part. Therefore, there is a need in the art for a method of joining galvanized or coated metals using a laser welding technique that results in robust welds without surface defects. There is also a need for a method of laser welding coated metal sheets that is economic and

easy to perform without removing a substantial portion of the protective coating resulting in a less corrosion resistant part.

Summary Of The Invention

There is disclosed a method of laser welding a number of coated metal sheets including the steps of: providing the coated sheets having opposing first and second surfaces, creating a raised region on at least one of the coated sheets, the raised region formed on the first surface and wherein the second surface remains continuous and uninterrupted, and applying a laser beam forming a laser weld wherein gases produced during the forming of the laser weld escape via the raised region. In a preferred aspect the raised region is formed by punching at least one embossment on at least one of the sheets, the embossment includes a depression having a raised peripheral edge.

[0006] In an alternative embodiment fine particles may be disbursed on the surface of one or both of the sheets of coated metal to introduce a gap for the gases produced during the forming of the laser weld a place to escape. Preferably the fine particles will be zinc dust to maintain the coating between the two sheets to be joined.

Brief Description Of The Drawings

[0007] Figure 1 is a diagram illustrating the steps of punching an embossment into the coated metal part forming the embossment of the first embodiment of the invention;

[0008] Figure 2 is a diagram illustrating the joining of two parts by laser welding having the embossments of the first embodiment of the invention;

[0009] Figure 3 illustrates the joining of two coated metal sheets having fine particles disbursed between according to the second embodiment of the present invention.

Detailed Description Of The Preferred Embodiments

[0010] Referring to Figure 1, there is shown an illustration detailing the formation of a raised region 19 comprising an embossment 20 a first embodiment of the method of the present invention. Referring to Figure 1A, a coated sheet metal 5 is placed in a press (not shown) which may be associated with an assembly line or may be offline as required. A press for use by the present invention does not require the presence of mating male and female dies as is commonly utilized in the art. Rather the press for use by the present invention requires only an anvil like surface opposite the punch 15; thereby, significantly lowering the cost of tooling.

[0011] The coated metal sheet 5 comprises a metal core 7 having layers of coating 10 applied to at least one side and preferably both sides of the sheet 5. A four sided spear-shaped punch 15 is introduced above the coated sheet 5 to create an embossment 20 allowing for the venting of weld gases during a welding process. As shown in Figure 1A, the spear-shaped punch 15 is a four sided body that preferably comprises a coated metal allowing for repeated use and strength. The spear-shaped punch 15 may be introduced in the upper or lower part of a tool to create the embossment 20 of the present invention.

[0012] Referring to Figure 1B, the spear-shaped punch 15 lances the metal sheet 5 from a direction corresponding to a first surface 23, causing the material on a periphery 25 to rise to a given height. Preferably, the spear-shaped punch 15 does not penetrate the entire metal sheet 5 but only penetrates to a depth sufficient to cause a specific rise at the periphery 25 or edge of the embossment 20. The second surface 24 of the metal sheet 5, opposite the first surface 23, remains continuous and uninterrupted. The second surface may have a contour that is associated with the part, but does not include a raised region or depression from interaction with the punch 15. In a preferred aspect of the present invention, a raised edge of approximately .007 inches is formed by the spear-shaped punch 15.

[0013] Referring to Figure 1C, it can be seen that metal is left on the periphery 25 with a slight rise of material allowing for the zinc gas to flow at the interface: As there are no channels which the zinc gas has to follow, the problem of zinc gas solidification further away from the heat resulting in the loss of corrosion protection is

avoided. The raised material at the periphery 25 creates a maximum amount of venting of zinc gas during the joining process resulting in an economic joining process easily maintained and controlled.

[0014] Referring to Figure 2, the process of the first embodiment utilizing punched embossments 20 to vent weld gases is shown. Referring to Figure 2E, two metal sheets or parts 5 to be joined are shown, with one of them having the punched embossments 20 previously described with reference to Figure 1. Although only one part 5 is shown with the punched embossments 20, both parts 5 may include embossments 20 formed as described previously with reference to Figure 1. As can be seen in Figure 2E, a laser weld 30 is formed by energizing a beam and drawing it across the part at a weld joint 35. The laser heats the two metal sheets 5 smelting the parts 5 together along the weld joint 35 joining the two parts 5 together. The laser may be continuously drawn over the two metal sheets forming a continuous weld bead or may be energized intermittently to form welds in a specific location.

[0015] With reference to Figure 2F, there is shown a top view of a part having an array 22 of embossments 20 formed by punching as previously described with reference to Figure 1. The red arrows indicate the flow of zinc gas formed by the introduction of the laser shown in Figure 2E. The array 22 or waffle area of embossments 20 allows the maximum flow of zinc gas formed by the laser to exit and flow without pressurizing and ejecting through the laser keyhole area of the weld joint 35.

[0016] With reference to Figure 2G, the joined part 40 is shown after the introduction of the laser, showing the zinc deposit 45 which forms in the weld area. The zinc gas vaporized by the joining process self-seals the gaps 50 between the two parts 5. As a result, the introduction of the laser should be limited to the minimum size area to be welded, due to the self-sealing affect of the solidification of the zinc gas.

[0017] Referring to Figure 3, there is shown a third embodiment of the method of the present invention. As opposed to forming embossments 20, as described in the first embodiment, fine particles 70 are distributed on the surface 75 of at least one of the sheet metal parts 5 to be joined; thereby, introducing a gap 60 between the two parts 5. The fine particles 70 may be loosely blown on the surface

75 or can be plasma sprayed onto the surface 75 of the coated sheet metal part 5. When using the plasma spraying technique, the particles 70 will be permanently bonded to the surface 75 before the two sheets 5 are joined. The introduction of fine particles 70 between the two sheets 5 will result in a gap 60 between the two sheets roughly the diameter of the particles. In a preferred aspect of the present invention, zinc dust is preferably placed between the two parts 5 to maintain the coating and also create the gap 60 previously described with reference to the diameter of the particles 70. Alternatively, steel dust may be utilized creating a more permanent gap 60 due to the higher melting point of steel, as compared to zinc.

[0018] As previously described with reference to the first embodiment, a laser weld is formed by energizing a laser to locally smelt the metal of the two parts 5 to be joined resulting in a laser weld joint 35. The zinc gas formed in the area by the laser is allowed to flow between the particles 70 introduced between the two sheet metal parts 5 thereby preventing the pressurization of zinc gas resulting in ejection through the laser keyhole area. Referring to Figure 4G, it can be seen that when zinc dust is utilized as the fine particle material 70, the zinc vaporizes and forms a deposit 80 in the weld area similar to the first embodiment. As a result, and as previously described with reference to the first embodiment, it is desirable to minimize the size of the affected area due to the self-sealing affect of the solidification of the zinc gas.

CLAIMS

What is claimed:

1. A method of laser welding a plurality of coated metal sheets comprising the steps of:

providing coated sheets of metal having opposing first and second surfaces;

creating a raised region on at least one of the coated sheets, the raised region formed on the first surface and wherein the second surface remains continuous and uninterrupted;

applying a laser beam forming a laser weld wherein gases produced during the forming of the laser weld escape via the at least one embossment.

2. The method of laser welding a plurality of coated metal sheets according to Claim 1 wherein the step of creating a raised region comprises punching at least one embossment on at least one coated metal sheet, the embossment comprising a depression having a raised peripheral edge.

3. The method of laser welding a plurality of coated metal sheets according to Claim 1 wherein the step of creating a raised region comprises applying fine particles between the plurality of coated metal sheets.

ABSTRACT

[0019] There is disclosed a method of laser welding a number of coated metal sheets including the steps of: providing the coated sheets to be joined, and creating a raised region on at least one of the coated sheets. The raised region is formed on a first surface of the metal sheet while the second opposite surface of the sheet remains continuous and uninterrupted. A laser is then applied forming a weld joint where gases produced during the forming of the laser weld escape via the at least one embossment.

[0020] In an alternative embodiment fine particles may be distributed on the surface of one or both of the sheets of coated metal to introduce a gap for the gases produced during the forming of the laser weld a place to escape. Preferably the fine particles will be zinc dust to maintain the coating between the two sheets to be joined.

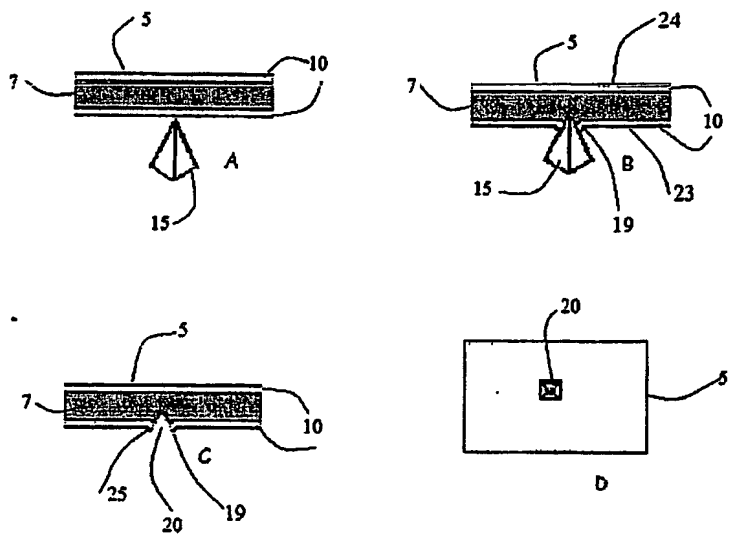


FIGURE 1

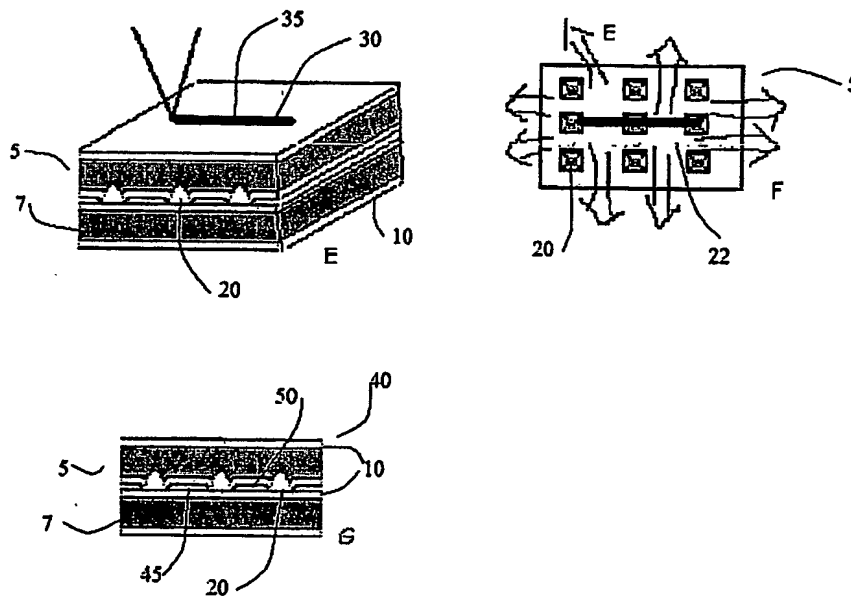


FIGURE 2

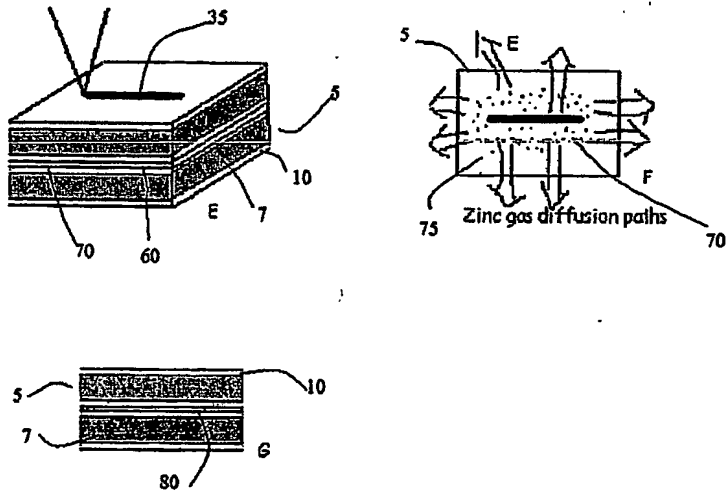


FIGURE 3